



Gulliver



VerticalPlatformLift

hydraulic vertical lifting system with shaft


The Gulliver is the result of years of technical research and development. With special attention paid to safety and comfort, the Gulliver can be perfectly adapted to a wide variety of applications.

Key features include:

- A range of platform sizes and accessories to suit any environment.
- Choice of door entry/exit.
- Shaft finish in solid or safety-glass panels.
- Zinc-plated, powder coated structure.
- Can be installed indoors or outdoors.



Specialists in PublicAccessSolutions

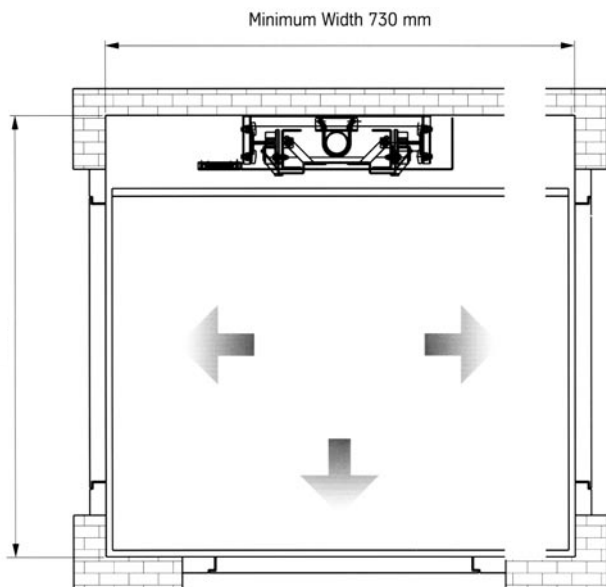

TECHNICAL SPECIFICATIONS	
Stops	max. 5
Capacity	300kg
Maximum Travel	15.1m
Minimum Pit Depth	100mm
Maximum Speed	15cm/s
Maximum Power	1.5kW
Power Supply	230Volt 50Hz
Operator Controls	'hold to run' buttons

A comprehensive range of door options available

Gulliver

VerticalPlatformLift

vertical lifting system with shaft

Options:

- Brushed stainless steel cabin wall panels.
- Choice of glass panels: clear, opaque, smokey grey, smokey grey satin, half-reflecting.
- Choice of solid panels in shaft: RAL painted steel, MDF white, ABET white.
- Remote controls.
- Access Ramp (when there is no pit).
- Resin box to house the electrical cabinet and hydraulic pump.
- Folding seat.

Specialists in PublicAccessSolutions

Lift Able a division of ThyssenKrupp Access Ltd

Head Office: Easter Park, Earlsway, Teesside Industrial Estate, Stockton-on-Tees TS17 9NT

Branch Office: 236 Europa Boulevard, Gemini Business Park, Warrington, Cheshire WA5 7TN

Please visit our website at www.liftable.co.uk or email public.access@liftable.co.uk

Due to continuous development in design, we reserve the right to change specifications without prior notice.



ENQUIRIES: 01642 768590 SERVICE: 01642 763646 FAX: 01642 766590

